



Expanded, Perforated & Wire Products

SAFE-T-PERF®

Locker Group's Safe-T-Perf is a perforated metal flooring product designed with anti-slip properties for added safety in stairing, planking or platform applications. Use it to create a skid resistant surface in industrial environments, or take advantage of its aesthetic features in an architectural design.

Manufactured from steel, aluminium or stainless steel, Safe-T-Perf® is corrosion resistant and its drainage holes prevent water and other liquids from pooling while still providing a commanding grip. Light-weight, this perforated product is simple and easy to install - and even easier to clean. Highly durable, it also retains excellent load bearing characteristics important for heavy-duty industrial situations.

PIC-PERF®

An innovative addition to Locker Group's architectural product range, Pic-Perf® allows any image to be stunningly recreated in perforated metal. Use it to add durable image based facades to new and existing structures; providing a unique, metallic texture. Create eye-catching super-imposed signage, corporate logos, special features - even use Pic-Perf® as the aesthetic basis of your entire design concept.

Pic-Perf® can be manufactured to any size, and will also generate a 3D effect if warranted. Made from perforated metal, Pic-Perf® can also act as a sunscreen and provides ventilation - as well as being long-lasting and easy to relocate. The proof of Pic-Perf® is in the viewing, so download the brochure and then discuss your design requirements with your Locker Group sales consultant.



Universal 14

Hole Dia(mm): 12.7 Spacing(mm): 37.00 Open Area: 49%

Ex-Stock Part Numbers Available:

SAFTPERFA 12.5 SAFTPERFN 13 SAFTPERFS 12



Stock Crate 19

Hole Dia(mm): 19.00 Spacing(mm): 42.00 Open Area: 24.21%

Ex-Stock Part Numbers Available:

INSAFPERFB 14 STKCRATP 14





EX-STOCK PERFORATED METAL PRODUCTS

How to Read Locker Group Part Numbers

The following information outlines Locker Group's Perforated Metal stock codes, which consists of the perforation code, material, sheet size and material thickness.

Material Types

A = Cold Rolled Mild Steel

B = Hot Rolled Mild Steel

G = Pre-galvanised Steel

■ = Zincalume®

K = Electro-Galvanised

N = Grade 5005 Aluminium

P = Grade 5251 Aluminium

S = Grade 304 Stainless Steel

T = Grade 316 Stainless Steel

Sheet Size

1 = 2438mm x 1219mm or 2400mm x 1200mm


2 = 2438mm x 915mm

7 = 915mm Wide Coil

8 = 1219mm Wide Coil

Other Codes

PVCX2 = Protective Film on two sides of sheet

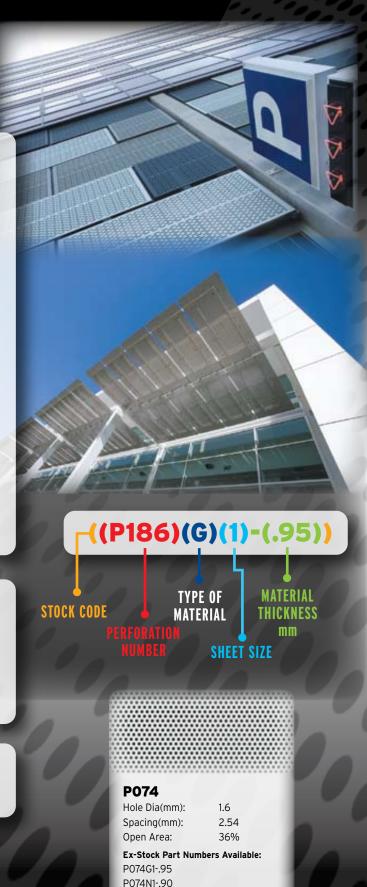

PO89 Hole Dia(mm):

 Hole Dia(mm):
 2.06

 Spacing(mm):
 3.10

 Open Area:
 40.7%

Ex-Stock Part Numbers Available:

P089G1-.95 P089N1-.90 P089N1-1.2 P089S8P-.90

P106

Hole Dia(mm): 2.41 Spacing(mm): 3.66 Open Area: 39.3%

Ex-Stock Part Numbers Available:

P106A1-.80 P106G1-.95 P106N1-1.2



P119

Hole Dia(mm): 2.41 Spacing(mm): 9.53 Open Area: 10%

Ex-Stock Part Numbers Available:

P119G1-.55 P119G1-.75 P119I7-.55 P119N1-.70



P136

 Hole Dia(mm):
 3.00

 Spacing(mm):
 6.00

 Open Area:
 22.7%

Ex-Stock Part Numbers Available:

P136G1-.75 P136G1-1.2 P136N1-1.2



P139

 Hole Dia(mm):
 3.23

 Spacing(mm):
 4.52

 Open Area:
 46.3%

Ex-Stock Part Numbers Available:

P139A1-1.0 P139G1-1.2 P139S8P-.90 P139G1-.75 P139K1-1.2 P139G1-.95

P139N1-1.2



 Hole Dia(mm):
 3.23

 Spacing(mm):
 4.78

 Open Area:
 41.4%

Ex-Stock Part Numbers Available:

P140G1-.75 P140S1-1.2 P140S1-1.5 P140S1-2.0



P142

Hole Dia(mm): 3.23 Spacing(mm): 5.56 Open Area: 31%

Ex-Stock Part Numbers Available:

P142A1-1.0 P142N1-1.2 P142A1-1.2 P142N1-1.6 P142G1-.75 P142S1-.70 P142G1-1.2 P142T1-1.5



P150

Hole Dia(mm): 3.50 Spacing(mm): 10.00 Open Area: 9.6%

Ex-Stock Part Numbers Available:

P150N1-2.0



P166

Hole Dia(mm): 3.97 Spacing(mm): 5.59 Open Area: 45.7%

Ex-Stock Part Numbers Available:

P166S1-1.5 P166T1-1.5

P186 Hole Dia(

Hole Dia(Spacing(i Open Are

P186A1-1.2

P186G1-.55 P186G1-.75 P186G1-.95



P266

Hole Dia Spacing Open Ar

P266A1-

P266G1-P266G1-



P457

Hole Dia Spacing(Open Ar

Ex-Stock P457G1-

P457N1-3



P186

Hole Dia(mm): 4.76 Spacing(mm): 6.35 Open Area: 51%

Ex-Stock Part Numbers Available:

 P186A1-1.0
 P186G1-1.6

 P186A1-1.2
 P186N1-.90

 P186G1-.55
 P186N1-1.2

 P186G1-.75
 P186N1-1.6

 P186G1-.95
 P186S8-.90



P188

Hole Dia(mm): 4.76 Spacing(mm): 25.40 Open Area: 2.8%

Ex-Stock Part Numbers Available:

P188K1-1.0



P220

Hole Dia(mm): 6.35 Spacing(mm): 9.53 Open Area: 40.3%

Ex-Stock Part Numbers Available:

P220A1-1.0 P220N1-1.6 P220A1-1.2 P220N1-2.0 P220A1-1.6 P220S1-1.2 P220G1-.95 P220S1-1.5 P220G1-1.2 P220S1-2.0 P220T1-1.5



P266

 Hole Dia(mm):
 9.53

 Spacing(mm):
 14.27

 Open Area:
 40.4%

Ex-Stock Part Numbers Available:

P266A1-1.0 P266N1-3.0 P266A1-1.6 P266S1-1.2 P266A1-3.0 P266S1-1.5 P266G1-.95 P266S1-2.0 P266G1-1.6 P266T1-1.5



P291

Hole Dia(mm): 12.7 Spacing(mm): 17.46 Open Area: 49%

Ex-Stock Part Numbers Available:

P291N1-2.0 P291G1-3.0



P329

Hole Dia(mm): 19.10 Spacing(mm): 25.40 Open Area: 51.3%

Ex-Stock Part Numbers Available:

P329G1-1.6 P329N1-2.5



P457

Hole Dia(mm): 11.00 SQ Spacing(mm): 16.00 Open Area: 47%

Ex-Stock Part Numbers Available:

P457G1-.95 P457N1-3.0 PVCX2



P501

 Hole Dia(mm):
 12.00 HEX

 Spacing(mm):
 16.00

 Open Area:
 56.25%

Ex-Stock Part Numbers Available:

P501G1-1.2



P738

Hole Dia(mm): 19.10 x 3.18 Spacing(mm): 3.18 Open Area: 41%

Ex-Stock Part Numbers Available:

P738G1-.95 P738N1-1.6



Expanded, Perforated & Wire Products

CORR-A-PERF®

Corr-A-Perf's® proven design flexibility, superior acoustic properties and simple fixing methods make it the reliable choice for any number of interior or exterior applications.

Corr-A-Perf® is suitable for:

- Wall & ceiling linings
- **Balustrades**
- Security Screens
- Sunscreens
- **Enclosures**
- Architectural Features

CUSTOM CAPABILITIES

Due to Locker Group's extensive experience in perforating, it is in a unique position to offer a customised perforating service.

The largest range of existing tooling plus a number of different perforating machines gives Locker Group the capabilities to provide a suitable solution for any application.

Only custom sheets are available with a full border around the sheet. In addition, customised sheets can include pre-punched fixing holes for easy and fast installation on site.

Please visit our website for a full list of custom perforation profiles.



Locker Group (NZ) Limited

12 Offenhauser Drive, East Tamaki, Auckland New Zealand Coy No 101326

Phone: +64 9 273 9825 Fax: +64 9 274 5940

Email: sales@lockernz.co.nz Website: www.lockernz.co.nz

P: (03) 341 8902 P: (09) 273 9825 F: (03) 341 5879 F: (09) 274 5940

P: (04) 499 7974 F: (04) 499 7075

TOLL FREE

0800 285 837

info@locker.com.au