Cumulus



Profile	Cumulus
Material	S/S T316, T304
Finish	Mill
Max. Width	4000mm
Max Length	As per Application
Open Area	61.5%
Weight	9.4 kg/m ²
Stock Status	Custom Made
Туре	Flexible
Wire Rod Dia	4mm
Wire Rope Dia	2.75mm
Wire Rod Pitch	14.5mm
Wire Rope Pitch	40mm
Form	Sheet

* Typical Architectural Installation

Applications:


Balustrades, Cladding, Facades, Interiors

Attachment Methods:

Locker Group Fixing systems; including Angle, Cap, Flat Bar or Tensioned. See website for more details.

Extra Notes:

Dimensions are nominal

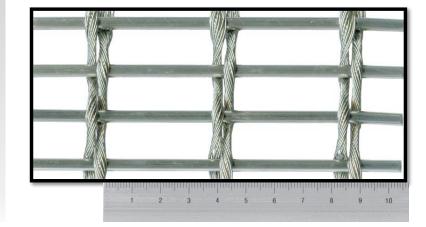

1800 635 947 (Aus) www.locker.com.au

0800 285 837 (NZ) www.lockernz.co.nz